


CHE28

Тип СН - ступенчатые закалённые толкатели

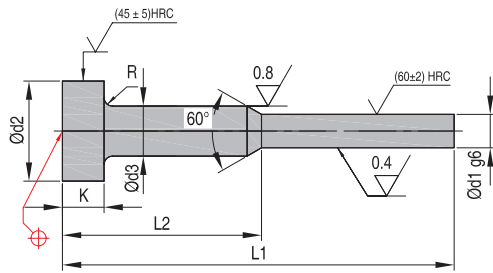

d1 = Диаметр стержня
 d2 = Диаметр головки
 d2 = Диаметр утолщения
 K = Толщина головки
 L1 = Длина
 L2 = Длина утолщения + длина головки
 Стандарт: DIN1530/ISO8694
 Материал: сталь WS (~1.2067)
 Макс. температура: 250 °C
 Шероховатость поверхности: Ra

Пример заказа (REF + L1): CHE2800-500080

REF	d1 g6	d2 0 -0.2	d3 h11	K 0 -0.05	R +0.2 0	L 1 ⁺² ₀										
						0063	0080	0100	0125	0160	0160	0160	0200	0250	0250	
						L 2 ⁻¹ ₂										
						0025	0035	0050	0050	0050	0063	0075	0075	0075	0100	
CHE2800-50	00,50	4,0	2,0	2,0	0,2											
CHE2800-60	00,60	4,0	2,0	2,0	0,2											
CHE2800-70	00,70	4,0	2,0	2,0	0,2											
CHE2800-80	00,80	4,0	2,0	2,0	0,2											
CHE2800-90	00,90	4,0	2,0	2,0	0,2											
CHE2801-00	01,00	4,0	2,0	2,0	0,2											
CHE2801-10	01,10	4,0	2,0	2,0	0,2											
CHE2801-20	01,20	4,0	2,0	2,0	0,2											
CHE2801-30	01,30	4,0	2,0	2,0	0,2											
CHE2801-40	01,40	4,0	2,0	2,0	0,2											
CHE2801-50	01,50	6,0	3,0	3,0	0,3											
CHE2801-60	01,60	6,0	3,0	3,0	0,3											
CHE2801-70	01,70	6,0	3,0	3,0	0,3											
CHE2801-80	01,80	6,0	3,0	3,0	0,3											
CHE2801-90	01,90	6,0	3,0	3,0	0,3											
CHE2802-00	02,00	6,0	3,0	3,0	0,3											
CHE2802-10	02,10	6,0	3,0	3,0	0,3											
CHE2802-20	02,20	6,0	3,0	3,0	0,3											
CHE2802-30	02,30	6,0	3,0	3,0	0,3											
CHE2802-40	02,40	6,0	3,0	3,0	0,3											
CHE2802-50	02,50	6,0	3,0	3,0	0,3											
CHE2802-60	02,60	6,0	3,0	3,0	0,3											
CHE2802-70	02,70	6,0	3,0	3,0	0,3											
CHE2802-80	02,80	6,0	3,0	3,0	0,3											
CHE2802-90	02,90	6,0	3,0	3,0	0,3											

Позиции не выделенные красным, доступны в специсполнении. Пожалуйста обратитесь с запросом к дистрибьютору.

* Для L1 0160 0250 добавьте (5), (6), (7) для L2