


S

Тип S- трубчатые толкатели азотированные

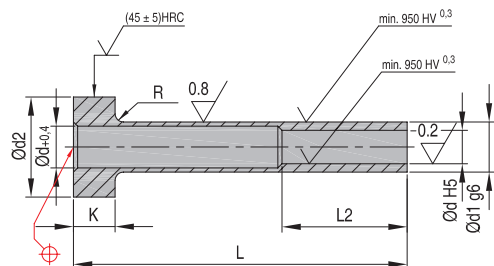

d = Внутренний диаметр
d1 = Внешний диаметр
d2 = Диаметр головки
K = Толщина головки
L1 = Общая длина
L2 = Рабочая длина
Стандарт: DIN16756/ISO8405
Материал: сталь WAS (~1.2344)
Макс. темп.: 500-550 °C
Шероховатость: Ra

Пример заказа (REF + L): S153150

Impiept sakada (REF: L1:5155156)

REF	d H5	d1 g6	d2 0 -0.2	L2	R	K 0 -0.05	L1 ⁺⁰ ₂															
							60	75	80	95	100	110	125	150	175	200	225	250	275	300	325	350
S153	1,5	3,0	6,0	35	0,3	3																
S163	1,6	3,0	6,0	35	0,3	3																
S173	1,7	3,0	6,0	35	0,3	3																
S183	1,8	3,0	6,0	35	0,3	3																
S24	2,0	4,0	8,0	35	0,3	3																
S224	2,2	4,0	8,0	35	0,3	3																
S255	2,5	5,0	10,0	35	0,3	3																
S275	2,7	5,0	10,0	45	0,3	3																
S285	2,8	5,0	10,0	45	0,3	3																
S35	3,0	5,0	10,0	45	0,3	3																
S325	3,2	5,0	10,0	45	0,3	3																
S356	3,5	6,0	12,0	45	0,5	5																
S376	3,7	6,0	12,0	45	0,5	5																
S46	4,0	6,0	12,0	45	0,5	5																
S428	4,2	8,0	14,0	45	0,5	5																
S458	4,5	8,0	14,0	45	0,5	5																
S58	5,0	8,0	14,0	45	0,5	5																
S528	5,2	8,0	14,0	45	0,5	5																
S610	6,0	10,0	16,0	45	0,5	5																
S6210	6,2	10,0	16,0	45	0,5	5																
S6510	6,5	10,0	16,0	45	0,5	5																
S812	8,0	12,0	20,0	45	0,8	7																
S8212	8,2	12,0	20,0	45	0,8	7																
S8512	8,5	12,0	20,0	45	0,8	7																
S1014	10,0	14,0	22,0	45	0,8	7																
S10214	10,2	14,0	22,0	45	0,8	7																
S10514	10,5	14,0	22,0	45	0,8	7																
S1114	11,0	14,0	22,0	45	0,8	7																
S1216	12,0	16,0	22,0	45	0,8	7																
S12516	12,5	16,0	22,0	45	0,8	7																
S1418	14,0	18,0	24,0	45	0,8	9																
S1620	16,0	20,0	26,0	50	0,8	9																
S1822	18,0	22,0	28,0	50	0,8	9																

Позиции не выделенные красным, доступны в специсполнении. Пожалуйста обратитесь с запросом к дистрибьютору.