


Тип EOA - Пазменно азотированный

EOA05

d1 = Диаметр толкателя
 d2 = Диаметр головки
 K = Толщина головки
 L = Длина
 Стандарт: DIN1530/ISO6751
 Материал: закаленная сталь WAS (~1.2344)
 Макс. температура: 500-550°C
 Шероховатость поверхности: Ra

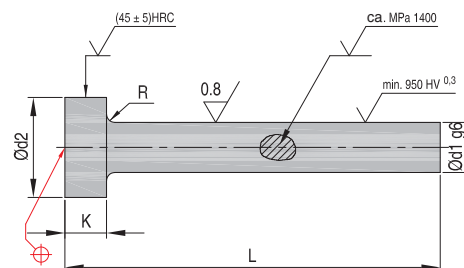

Пример заказа (REF + L): EOA0501-500100

REF	d1 g6	d2 0 -0.2	K 0 -0.05	R +0.2 0	L ⁺² ₀														
					0100	0125	0160	0200	0250	0315	0400	0500	0630	0800	1000				
EOA0501-50	01,50	3,0	1,5	0,2															
EOA0502-00	02,00	4,0	2,0	0,2															
EOA0502-20	02,20	4,0	2,0	0,2															
EOA0502-50	02,50	5,0	2,0	0,3															
EOA0502-70	02,70	5,0	2,0	0,3															
EOA0503-00	03,00	6,0	3,0	0,3															
EOA0503-20	03,20	6,0	3,0	0,3															
EOA0503-50	03,50	7,0	3,0	0,3															
EOA0503-70	03,70	7,0	3,0	0,3															
EOA0504-00	04,00	8,0	3,0	0,3															
EOA0504-20	04,20	8,0	3,0	0,3															
EOA0504-50	04,50	8,0	3,0	0,3															
EOA0505-00	05,00	10,0	3,0	0,3															
EOA0505-20	05,20	10,0	3,0	0,3															
EOA0505-50	05,50	10,0	3,0	0,3															
EOA0506-00	06,00	12,0	5,0	0,5															
EOA0506-20	06,20	12,0	5,0	0,5															
EOA0506-50	06,50	12,0	5,0	0,5															
EOA0507-00	07,00	12,0	5,0	0,5															
EOA0507-50	07,50	12,0	5,0	0,5															
EOA0508-00	08,00	14,0	5,0	0,5															
EOA0508-20	08,20	14,0	5,0	0,5															
EOA0508-50	08,50	14,0	5,0	0,5															
EOA0509-00	09,00	14,0	5,0	0,5															
EOA0509-50	09,50	14,0	5,0	0,5															
EOA0510-00	10,00	16,0	5,0	0,5															
EOA0510-20	10,20	16,0	5,0	0,5															
EOA0510-50	10,50	16,0	5,0	0,5															
EOA0511-00	11,00	16,0	5,0	0,5															
EOA0512-00	12,00	18,0	7,0	0,8															
EOA0512-20	12,20	18,0	7,0	0,8															
EOA0512-50	12,50	18,0	7,0	0,8															
EOA0514-00	14,00	22,0	7,0	0,8															
EOA0516-00	16,00	22,0	7,0	0,8															
EOA0518-00	18,00	22,0	7,0	0,8															
EOA0520-00	20,00	26,0	8,0	1,0															
EOA0525-00	25,00	26,0	10,0	1,0															
EOA0532-00	32,00	40,0	10,0	1,0															

Позиции не выделенные красным, доступны в специсполнении. Пожалуйста обратитесь с запросом к дистрибьютору.

