


ENA05

Тип ТА - Жидкостноазотированный

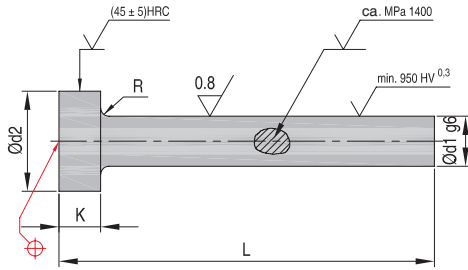

d1 = Диаметр толкателя  
 d2 = Диаметр головки  
 K = Толщина головки  
 L = Длина  
 Стандарт: DIN1530/ISO6751  
 Материал: закаленная сталь WAS (~1.2344)  
 Макс. температура: 500-550 °C  
 Шероховатость поверхности: Ra

Пример заказа (REF + L): ENA0501-500100

REF	d1 g6	d2 0 -0.2	K 0 -0.05	R +0.2 0	L <sub>0</sub> <sup>+2</sup>																
					0100	0125	0160	0200	0250	0315	0400	0500	0630	0800	1000						
ENA0501-50	01,50	3,0	1,58	0,2																	
ENA0502-00	02,00	4,0	2,0	0,2																	
ENA0502-20	02,20	4,0	2,0	0,2																	
ENA0502-50	02,50	5,0	2,0	0,3																	
ENA0502-70	02,70	5,0	2,0	0,3																	
ENA0503-00	03,00	6,0	3,0	0,3																	
ENA0503-20	03,20	6,0	3,0	0,3																	
ENA0503-50	03,50	7,0	3,0	0,3																	
ENA0503-70	03,70	7,0	3,0	0,3																	
ENA0504-00	04,00	8,0	3,0	0,3																	
ENA0504-20	04,20	8,0	3,0	0,3																	
ENA0504-50	04,50	8,0	3,0	0,3																	
ENA0505-00	05,00	10,0	3,0	0,3																	
ENA0505-20	05,20	10,0	3,0	0,3																	
ENA0505-50	05,50	10,0	3,0	0,3																	
ENA0506-00	06,00	12,0	5,0	0,5																	
ENA0506-20	06,20	12,0	5,0	0,5																	
ENA0506-50	06,50	12,0	5,0	0,5																	
ENA0507-00	07,00	12,0	5,0	0,5																	
ENA0508-00	08,00	14,0	5,0	0,5																	
ENA0508-20	08,20	14,0	5,0	0,5																	
ENA0508-50	08,50	14,0	5,0	0,5																	
ENA0509-00	09,00	14,0	5,0	0,5																	
ENA0510-00	10,00	16,0	5,0	0,5																	
ENA0510-20	10,20	16,0	5,0	0,5																	
ENA0510-50	10,50	16,0	5,0	0,5																	
ENA0511-00	11,00	16,0	5,0	0,5																	
ENA0512-00	12,00	18,0	7,0	0,8																	
ENA0512-20	12,20	18,0	7,0	0,8																	
ENA0512-50	12,50	18,0	7,0	0,8																	
ENA0514-00	14,00	22,0	7,0	0,8																	
ENA0516-00	16,00	22,0	7,0	0,8																	
ENA0518-00	18,00	24,0	7,0	0,8																	
ENA0520-00	20,00	26,0	8,0	1,0																	
ENA0525-00	25,00	32,0	10,0	1,0																	

Позиции не выделенные красным, доступны в специсполнении. Пожалуйста обратитесь с запросом к дистрибьютору