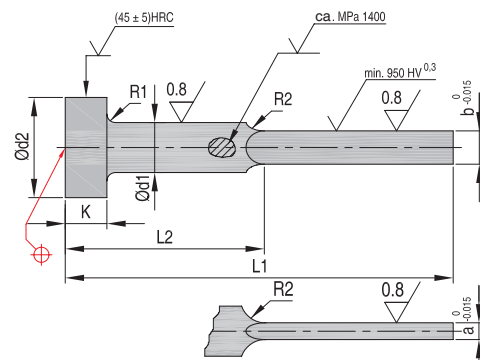


Тип FW - ступенчатые азотированные толкатели
FW

d1 = Диаметр стержня
d2 = Диаметр головки
K = Толщина головки
a =
b =
L1 = Длина
L2 = Длина утолщения + длина головки
Стандарт: DIN1530/ISO8693
Материал: закаленная сталь WAS (~1.2344)
Макс. температура: 250 °C
Шероховатость поверхности: Ra


Пример заказа (REF + L1): FW0-83-563

Пример заказа (REF = F17.1 W0-5 505)

REF	R1 ^{+0.2} ₀	R2	K ⁰ _{-0.05}	d2 ⁰ _{-0.2}	d1 h11	a ⁰ _{-0.015}	b ⁰ _{-0.015}	L 1 ⁺² ₀									
								63	80	100	125	160	200	250	315	400	
								L 2 ⁺¹ ₋₂									
								32	40	50	63	80	100	125	160	200	
FW0-83-5	0,3	10	3	8,0	4,0	0,8	3,5										
FW0-83-8	0,3	10	3	8,0	4,2	0,8	3,8										
FW1-03-5	0,3	10	3	8,0	4,0	1,0	3,5										
FW1-23-5	0,3	10	3	8,0	4,0	1,2	3,5										
FW1-03-8	0,3	10	3	8,0	4,2	1,0	3,8										
FW1-23-8	0,3	10	3	8,0	4,2	1,2	3,8										
FW1-04-5	0,3	10	3	10,0	5,0	1,0	4,5										
FW1-24-5	0,3	10	3	10,0	5,0	1,2	4,5										
FW1-54-5	0,3	10	3	10,0	5,0	1,5	4,5										
FW1-64-5	0,3	10	3	10,0	5,0	1,6	4,5										
FW1-84-5	0,3	10	3	10,0	5,0	1,8	4,5										
FW1-05-5	0,5	10	5	12,0	6,0	1,0	5,5										
FW1-25-5	0,5	10	5	12,0	6,0	1,2	5,5										
FW1-55-5	0,5	10	5	12,0	6,0	1,5	5,5										
FW1-65-5	0,5	10	5	12,0	6,0	1,6	5,5										
FW1-85-5	0,5	10	5	12,0	6,0	1,8	5,5										
FW2-05-5	0,5	10	5	12,0	6,0	2,0	5,5										
FW1-27-5	0,5	10	5	14,0	8,0	1,2	7,5										
FW1-57-5	0,5	10	5	14,0	8,0	1,5	7,5										
FW1-67-5	0,5	10	5	14,0	8,0	1,6	7,5										
FW1-87-5	0,5	10	5	14,0	8,0	1,8	7,5										
FW2-07-5	0,5	10	5	14,0	8,0	2,0	7,5										
FW1-59-5	0,5	10	5	16,0	10,0	1,5	9,5										
FW1-89-5	0,5	10	5	16,0	10,0	1,8	9,5										
FW2-09-5	0,5	10	5	16,0	10,0	2,0	9,5										
FW2-011-5	0,8	10	7	18,0	12,0	2,0	11,5										
FW2-511-5	0,8	10	7	18,0	12,0	2,5	11,5										
FW2-012-0	0,8	10	7	18,0	12,5	2,0	12,0										
FW2-512-0	0,8	10	7	18,0	12,5	2,5	12,0										
FW2-015-0	0,8	10	7	22,0	16,0	2,0	15,0										
FW2-515-0	0,8	10	7	22,0	16,0	2,5	15,0										
FW2-015-5	0,8	10	7	22,0	16,0	2,0	15,5										
FW2-515-5	0,8	10	7	22,0	16,0	2,5	15,5										

Позиции не выделенные красным, доступны в специсполнении. Пожалуйста обратитесь с запросом к дистрибьютору.

