


EPA05

Тип А - Азотированный

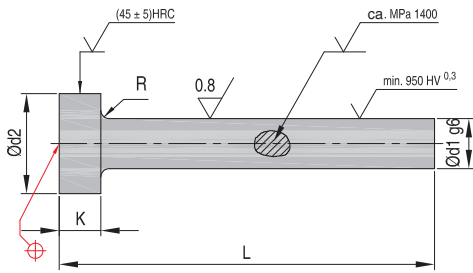

d1 = Диаметр толкателя  
 d2 = Диаметр головки  
 K = Толщина головки  
 L = Длина  
 Стандарт: DIN1530/ISO6751  
 Материал: закаленная сталь WAS (~1.2344)  
 Макс. температура: 500-550°C  
 Шероховатость поверхности: Ra

Пример заказа (REF + L): EPA0501-000100

REF	d1 g6	d2 0 -0,2	K 0 -0,05	R +0,2 0	L <sup>+2</sup> 0															
					0100	0125	0160	0200	0250	0315	0400	0500	0630	0800	1000	1250				
EPA0501-00	01,00	2,5	1,2	0,2																
EPA0501-20	01,20	2,5	1,2	0,2																
EPA0501-00	01,00	3,0	1,5	0,2																
EPA0501-20	01,20	3,0	1,5	0,2																
EPA0501-50	01,50	3,0	1,5	0,2																
EPA0501-60	01,60	3,0	1,5	0,2																
EPA0501-70	01,70	3,0	1,5	0,2																
EPA0502-00	02,00	4,0	2,0	0,2																
EPA0502-20	02,20	4,0	2,0	0,2																
EPA0502-50	02,50	5,0	2,0	0,3																
EPA0502-70	02,70	5,0	2,0	0,3																
EPA0503-00	03,00	6,0	3,0	0,3																
EPA0503-10	03,10	6,0	3,0	0,3																
EPA0503-20	03,20	6,0	3,0	0,3																
EPA0503-50	03,50	7,0	3,0	0,3																
EPA0503-70	03,70	7,0	3,0	0,3																
EPA0504-00	04,00	8,0	3,0	0,3																
EPA0504-10	04,10	8,0	3,0	0,3																
EPA0504-20	04,20	8,0	3,0	0,3																
EPA0504-50	04,50	8,0	3,0	0,3																
EPA0505-00	05,00	10,0	3,0	0,3																
EPA0505-10	05,10	10,0	3,0	0,3																
EPA0505-20	05,20	10,0	3,0	0,3																
EPA0505-50	05,50	10,0	3,0	0,3																
EPA0506-00	06,00	12,0	5,0	0,5																
EPA0506-10	06,10	12,0	5,0	0,5																
EPA0506-20	06,20	12,0	5,0	0,5																
EPA0506-50	06,50	12,0	5,0	0,5																
EPA0507-00	07,00	12,0	5,0	0,5																
EPA0507-50	07,50	12,0	5,0	0,5																
EPA0508-00	08,00	14,0	5,0	0,5																
EPA0508-10	08,10	14,0	5,0	0,5																
EPA0508-20	08,20	14,0	5,0	0,5																
EPA0508-50	08,50	14,0	5,0	0,5																
EPA0509-00	09,00	14,0	5,0	0,5																
EPA0509-50	09,50	14,0	5,0	0,5																
EPA0510-00	10,00	16,0	5,0	0,5																
EPA0510-10	10,10	16,0	5,0	0,5																
EPA0510-20	10,20	16,0	5,0	0,5																
EPA0510-50	10,50	16,0	5,0	0,5																
EPA0511-00	11,00	16,0	5,0	0,5																
EPA0512-00	12,00	18,0	7,0	0,8																
EPA0512-20	12,20	18,0	7,0	0,8																
EPA0512-50	12,50	18,0	7,0	0,8																
EPA0514-00	14,00	22,0	7,0	0,8																
EPA0514-20	14,20	22,0	7,0	0,8																
EPA0516-00	16,00	22,0	7,0	0,8																
EPA0518-00	18,00	24,0	7,0	0,8																
EPA0520-00	20,00	26,0	8,0	1,0																
EPA0525-00	25,00	32,0	10,0	1,0																
EPA0532-00	32,00	40,0	10,0	1,0																

Позиции не выделенные красным, доступны в специсполнении. Пожалуйста обратитесь с запросом к дистрибьютору